

Product Specifications

Solid or Louvered
Access panels

**CEILING ACCESS
PANELS**




LOUVERED

(965, 966, 967, 967-4, 967-6, 967-8)



SOLID

(965-1, 966-1, 967-1, 963-1, 964-1, 967-5, 967-7)

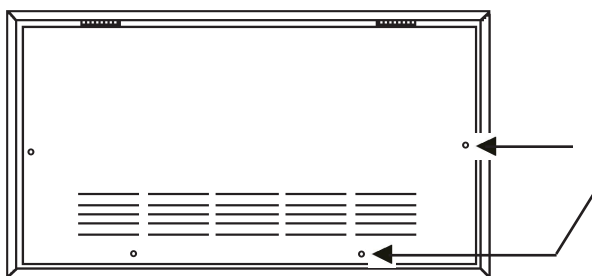

(963, 964)

captive screws now on all panels
(screws stay in panel when opened)

FEATURES:

- 1) **Louvered** models available for bottom return air.
- 2) **Hinged** panel is removable from frame and can be reversed for better clearance.
- 3) **Surface mount** - does not have to perfectly match opening.
- 4) **No frame screws** show after installation.
- 5) Heavy gauge **galvanized steel**.
- 6) Attractive **baked on white** epoxy coating can be latex painted in the field.
- 7) **Filter clips** on 965, 966 and 967, accept a 20 x 20 x 1 field-provided filter. 967-3 accepts 25 x 20 x 1 field-provided filter. 967-4 has a factory installed 10 x 65 x 1 filter (permanent)





Product Specifications

Solid or Louvered
Access panels

CEILING ACCESS
PANELS

PHYSICAL DATA

FOR FAN COIL MODEL	DESCRIPTION (LOUVERED OR SOLID)	PANEL NUMBER	FRAME DIMENSIONS (OPENING)		FRAME DIMENSIONS (OUTSIDE)	
			A	B	E	F
3-6YHBC, 3-6YPHBC, 3YHH-8YHH	LOUVERED	965	24-1/2	40	27-1/2	43
	SOLID	965-1				
8YHBC, 8YPHBC, 10YHH	LOUVERED	966	24-1/2	46	27-1/2	49
	SOLID	966-1				
10YHBC, 10YPHBC, 12YHH	LOUVERED	967	24-1/2	52-1/2	27-1/2	55-1/2
	SOLID	967-1				
13YHBC, 13YPHBC	LOUVERED	967-4	24-1/2	67	27-1/2	70
	SOLID	967-5				

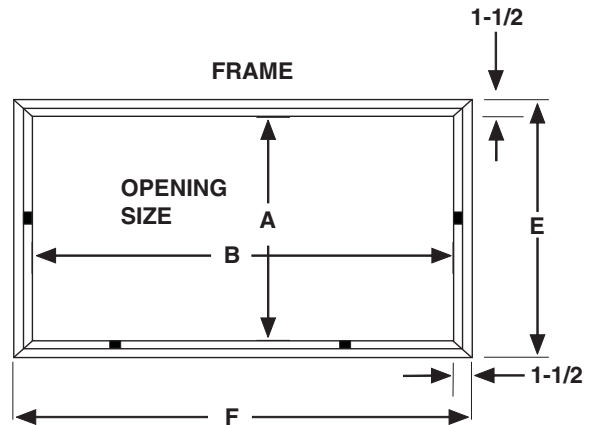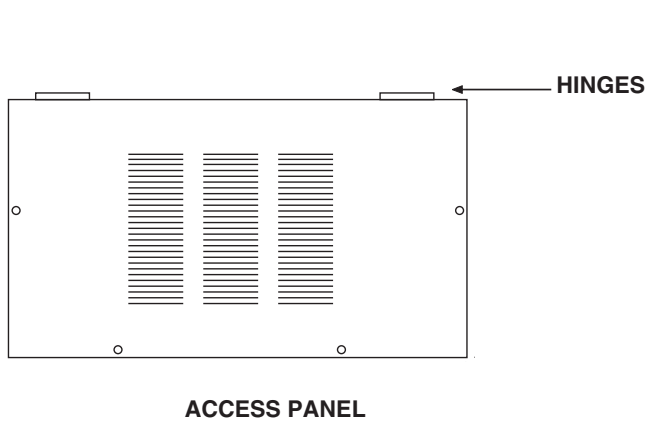

ACCESS PANEL FRAME
INSTALLATION DETAIL

In keeping with its policy of continuous progress and product improvement, Airside Products reserves the right to make changes without notice.

